



MAQUINARIA AGRÍCOLA SEGUÉS S.L.

Avda. Santuari s/n
25215 SANT RAMON
(Lleida)
Tel.: +34 973 52 43 36
Fax: +34 973 52 43 81

www.seguessl.com
segues@seguessl.com
recanvis@seguessl.com
export@seguessl.com
administracio@seguessl.com



SPRING TINE AND TWO SIDED SHARE VIBRO LAND CULTIVATOR



WWW.SEGUESSL.COM

www.seguessl.com

SEGUÉS, Since 1978 offering quality and performance

To perform not too deep tilling jobs and over stubble, it's bare need a Segué's vibro land cultivator **SEGUÉS CBF**, where the tine vibration combined with the 65 mm width share's penetration capacity, assure a great job and an unbeatable finish.

CBF Land cultivators strong points

Benefits

- Designed with three tine lines
- Strong frame
- Tines screwed over solid steel bars
- Height adjustable roller and harrow
- Kongskilde Vibro tines
- 192 mm distance between tines
- Third point Hitch
- Quick linkage hitch with bar included
- Versions over 3 m hydraulically foldable and untill 6 m



Three tine lines



Quick linkage



Hydraulically foldable from 3 m



Roller adjustment system



Tines screwed over solid steel bars



Kongskilde vibro tines

SEGUÉS CBF land cultivators standard features

- Third point quick linkage
- Kongskilde Vibro tines
- Tines made in high quality steel
- 65 mm two sided shares
- Ø400 roller
- roller height adjustable
- Strong and reinforced frame
- High quality prime and coating, with high corrosive tough (water, sun, moist, etc...)



Ø400 roller with bearing



High quality steel two sided share



Reinforced frame with structural tube




Third point linkage

TECHNICAL FEATURES

SEGUÉS CBF LAND CULTIVATORS

Model	Tines	Working width	Transport width	Length	Height	Weight	Power
CBF-11	11	2.150 mm	2.150 mm	2.200 mm	1.350 mm	670 kg	50/65 cv
CBF-13	13	2.500 mm	2.500 mm	2.200 mm	1.350 mm	730 kg	65/85 cv
CBF-16	16	3.050 mm	3.050 mm	2.200 mm	1.350 mm	820 kg	80/105 cv
CBFH-19	19	3.600 mm	3.000 mm	2.500 mm	1.600 mm	1.380 kg	100/130 cv
CBFH-22	22	4.250 mm	3.000 mm	2.500 mm	1.600 mm	1.600 kg	130/160 cv
CBFH-25	25	4.900 mm	3.000 mm	2.500 mm	1.600 mm	1.820 kg	160/175 cv
CBFH-28	28	5.400 mm	3.000 mm	2.500 mm	1.600 mm	2.040 kg	180/210 cv
CBFH-31	31	5.900 mm	3.000 mm	2.500 mm	1.600 mm	2.260 kg	+240 cv

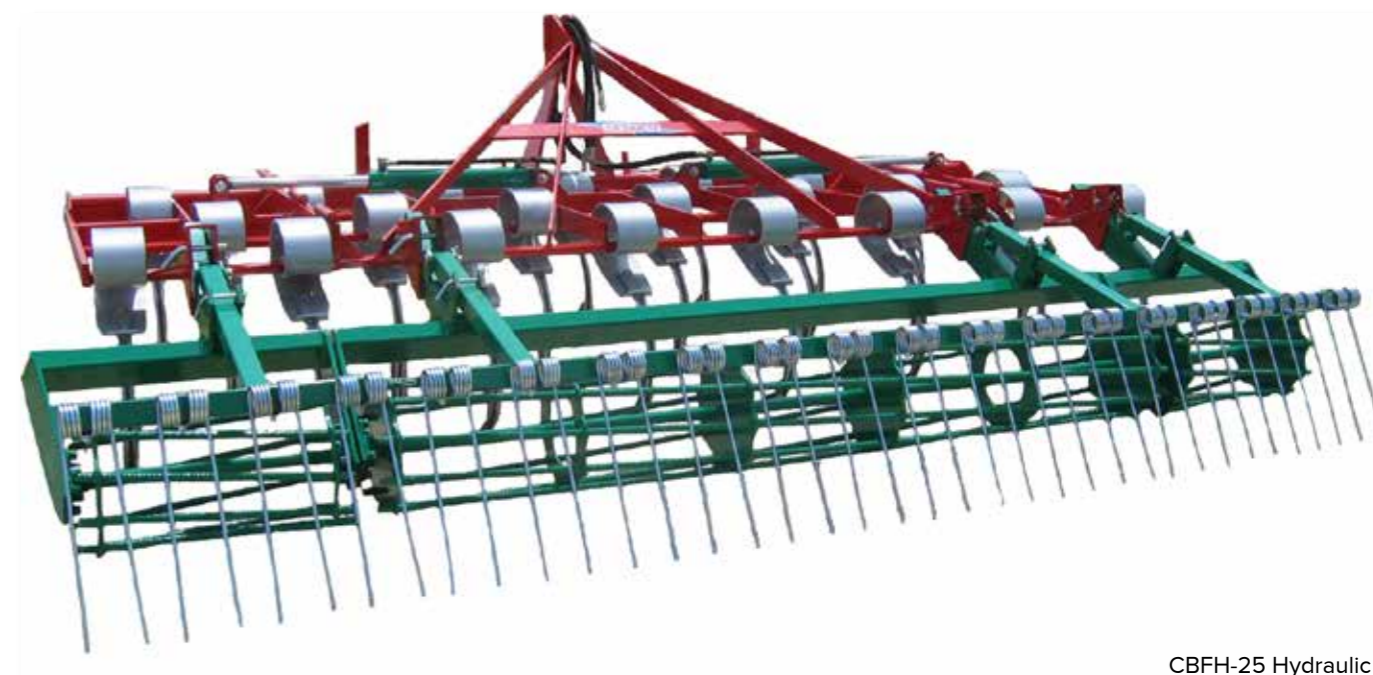

CBFH-25 Hydraulic

SEGUÉS VIBRO LAND CULTIVATORS AVAILABLE OPTIONS



10mm springs harrow



Rear twin roller