



# FERTILIZER SPREADER RAD



MAQUINARIA AGRÍCOLA SEGUÉS S.L.

Av. Santuari s/n  
25215 SANT RAMON  
(Lleida)  
Tel.: +34 973 524 336

[www.segues.es](http://www.segues.es)  
[segues@seguessl.com](mailto:segues@seguessl.com)



# FERTILIZER SPREADER RAD

**SEGUÉS AGRICULTURAL MACHINERY perfecting fertilization since 1978.**


SEGUÉS RAD spreaders are synonymous with superior quality in fertilizer distribution. With a robust and durable construction, these machines are designed to withstand the most demanding conditions. The hopper has been meticulously designed to guarantee an optimal free fall of the product, ensuring a uniform and efficient application. The double centrifugal disc system allows working widths of up to 24 meters to be reached, optimizing time and effort in the field. With SEGUÉS RAD spreaders, you take efficiency and precision in fertilization to a whole new level.

## The strengths of the RAD series fertiliser spreaders:

- Hydraulic drive of the product outlets.
- Double set of interchangeable and adjustable blades for optimal distribution.
- Larger diameter discs for greater width and better distribution
- Discs driven by an independent hydraulic unit
- Distribution system made of 100% stainless steel.
- Two drops inside the hopper, one for each disc.
- Galvanised and removable sieve.
- Double front viewfinder on the hopper.
- Height-adjustable lance with suspension.
- Screwed rotating coupling.

## Standard equipment:

- Double transmission.
- Removable manual support.
- Access ladder to the hopper
- Double set of distributor blades
- Hydraulic service brake and mechanical parking brake.
- Position, brake, flashing and clearance lights.
- High quality, anti-corrosion paint and primer.
- Galvanized tramex screen.
- 385/65 R 22.5 wheels

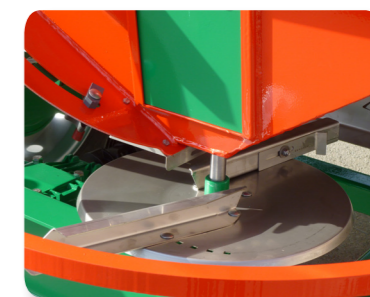

## TECHNICAL CHARACTERISTICS

Model	Weight	Hopper	Wide	High	Length
RAD-6000	2.250 kg	5.000 l	2.550 mm	2.530 mm	4.633 mm
RAD-8000	2.400 kg	6.500 l	2.550 mm	2.730 mm	4.633 mm



## OPTIONAL EQUIPMENT

- Stainless steel hopper on both models.
- Adjustable awning.
- New 550/45-22.5 flotation tires
- New 500/50-17 flotation tires
- Hydraulic support + manual pump
- Boundary deflector valid on both sides.
- Transmission with homokinetic joint.

